

PRODUCTS ASSORTMENT

SUNNYDAY solar panels


They are identified by the code **SD** followed by the length in mm (SD 3000 is 3 m long).

The net absorbing surface is 0,31 m² per m of length.

The serial lengths are 2, 3, 4, 6, 9 and 12m;

m. 2	SD 2000
m. 3	SD 3000
m. 4	SD 4000
m. 6	SD 6000
m. 9	SD 9000
m. 12	SD 12000

other lengths are possible for minimal quantities to be agreed. The solar panels are connected each other and to the inlet - outlet pipes by means of special fittings contained in Accessories Packages.

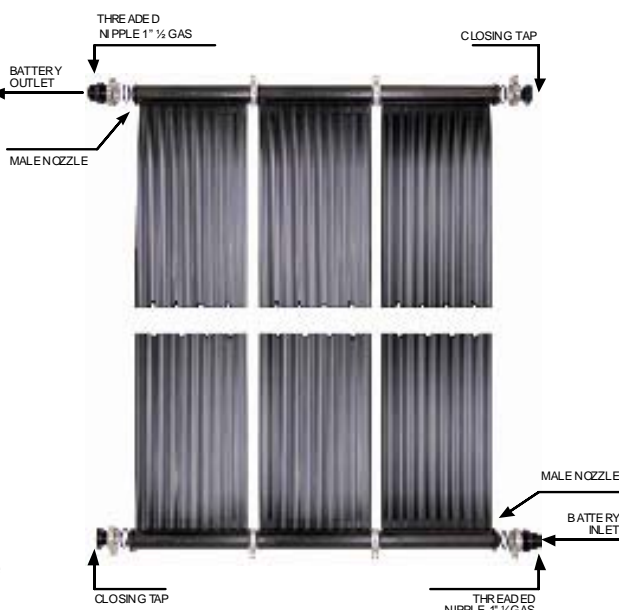

Package of Accessories for the Collector (code AC)

It contains the fittings necessary to connect each collector to the next in order to obtain a battery.

1 package AC each solar panel (included the last one of the battery) is necessary.

Content of the accessories packages:

Inox fastening bands	2
O-rings	2
Inox screw bolts and nuts fasten the bands	2



Package of Accessories for the Battery (code AB)

It contains the fittings necessary to complete the battery: connection to the inlet - outlet pipes and closing of the other two extremities.

1 package AB each battery is necessary.

Content of the accessories packages:

Polypropylene 1" ½ inch. male fittings	2
Polypropylene caps	2
Inox fastening bands	2
O-rings	2
Inox screw bolts and nuts fasten the bands	2



Differential Thermostat included sensors and sensors inox ½" sheaths.

